

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PBT;
2. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm
3. PANEL FRAME:CARBON STEEL, POWDER,
COATING IN BLACK COLOR, Spcc1.5mm;
4. PCB MATERIAL:FR-4 T=1.6mm ;
5. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE;
WITH NICKEL PATING;
6. RJ45 JACK LIFE:750 TIMES MIN;
7. IDC LIFE:200 TIMES MIN;
8. WIRE:AWG 22-26;

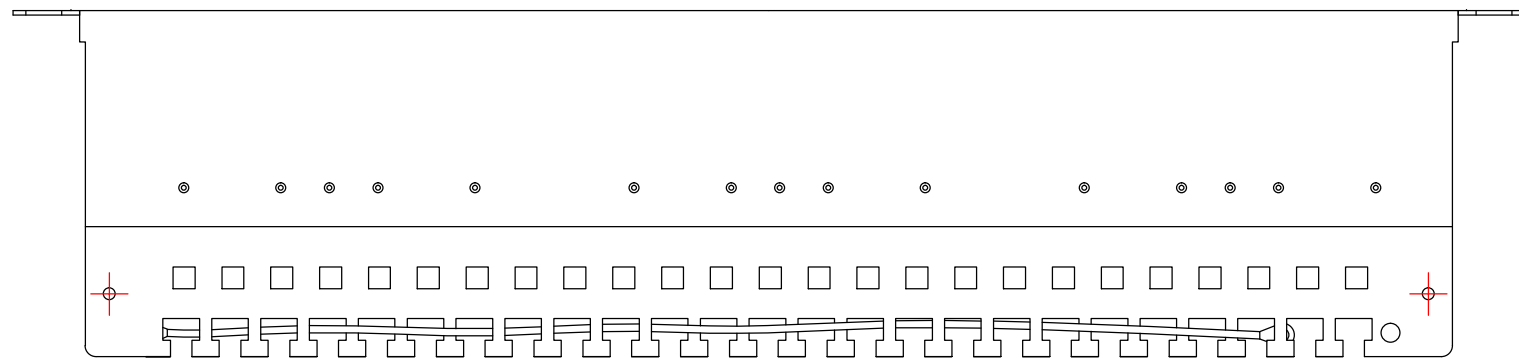

					Material				Item No.	
					Angles Projection	Size	Scale	Unit		
Drawn						A4	X:1	mm	Part Name	24Ports Cat5e STP Patch Panel
Checked									ERP	
Approved					Sheet	1 OF 1	Version: A/0		Part No.	
					Tolerance					
					0.00-20.00	±0.10				
					20.00-50.00	±0.15				
					50.00-100.00	±0.20				
					100.00-	±0.25				
					Angle	±30'				