
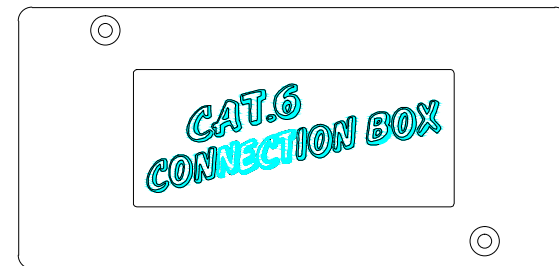


A ↑

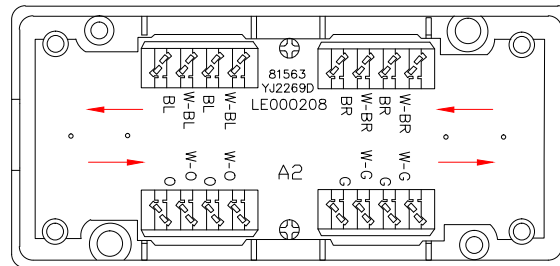

OPEN TOP

TOP

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

**ENVIRONMENTAL:**

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

**MECHANICAL:**

1. HOUSING MATERIAL: ABS
2. INSERT MATERIAL: FAME RETARDANCY ABS
3. PCB MATERIAL: FR-4 T=1.6mm
4. IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
5. IDC LIFE: 200 TIMES MIN

					<b>EUCON</b> <small>European teleCOMmunications</small>				
								Item No.	04-004-006
SYM		Number	Bill No. of Alteration	Signature	Date	Material	Size	Scale	Unit
Drawn					Angles Projection		A4	X:1	mm
Checked					Tolerance				
Approved					Sheet		1 OF 1	Version: A/0	
									Part Name
									Cat6 Connection Box Un-shielded type Krone&110 IDC block
									ERP Part No.