



## Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard.

## Feature

- 19 inch standard;
- Removable Side Panels, side locks optional;
- Knock off hole for entering cable on both top cover, bottom panel, real panel
- Turning angle of front door is over 180 degrees
- Easy mounting installation
- Unassembled package saving shipping space
- fans, shelf, PDU are optional

## Loading Capacity

80KG

## Degree of Protection

IP20

## Material

SPCC Cold Rolled Steel  
 Thickness: 2.0mm-1.2mm-0.8mm

## Surface Finish:

Powder coating

## Cabinet details



Fan exhaust hole



Fan unit optional



Removable side panels  
 (Side lock optional)



Cable entrance on rear panel




Front tempered glass door  
 with metal perforated border




Zinc plated mounting profile  
 (Ground wire optional)

## Exploded-View

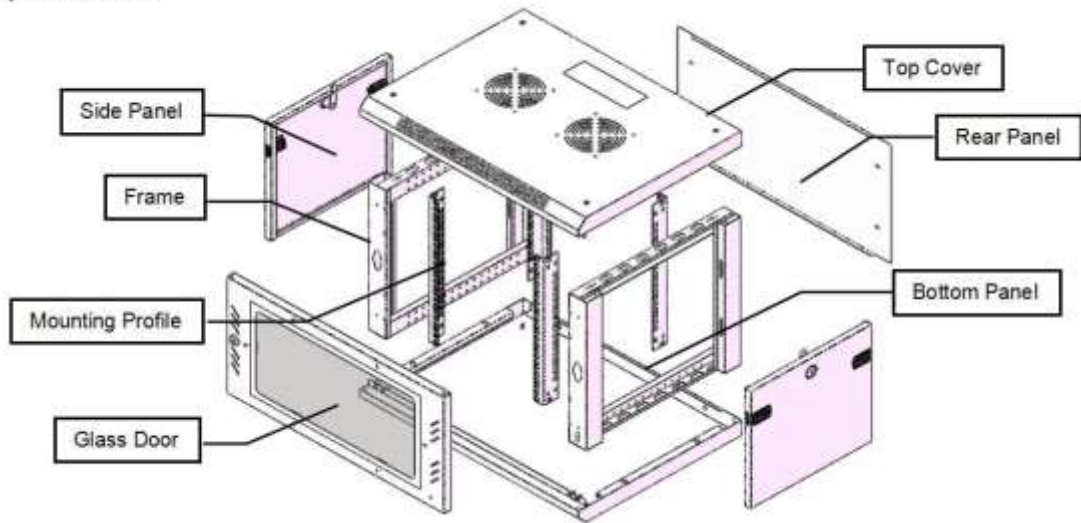

## Main dimension

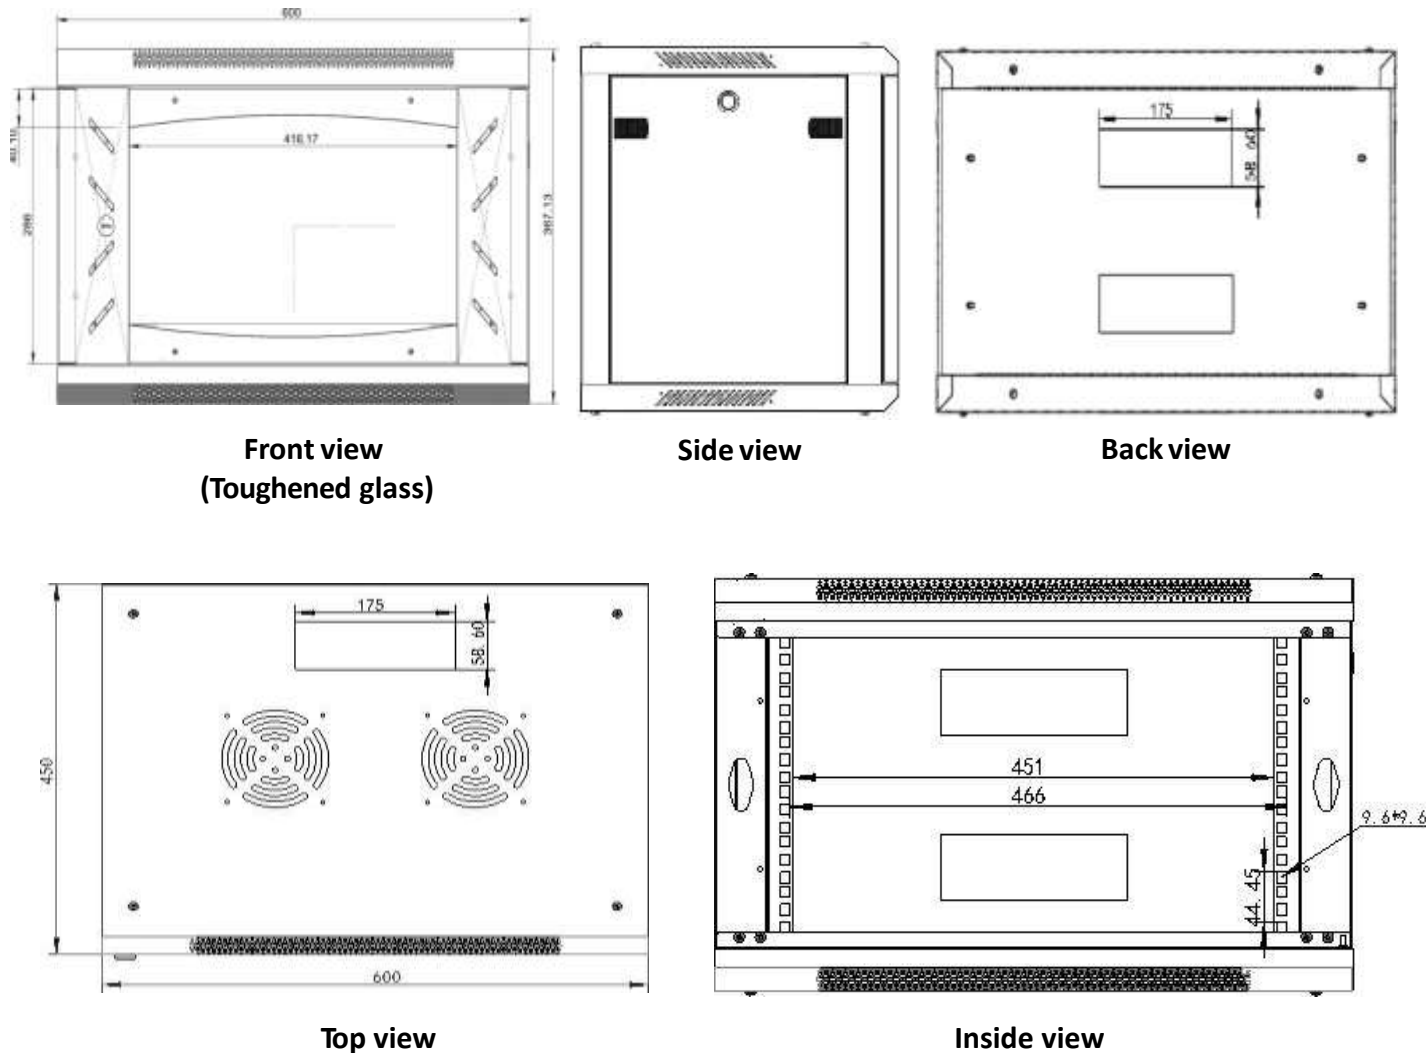

## Main Parts

	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Mounting profile	4	Piece	Coated Zinc plate t2.0	Coated Zinc	with U mark
2	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	
3	Side panel	2	Piece	SPCC cold rolled steel t0.8	Powder coated	
4	Top cover	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
5	Bottom panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
6	Rear panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
7	Front door	1	Piece	5MM toughened glass door/SPCC t1.0	Powder coated	
8	Lock	1	Piece	Steel	Color Zinc	with 2 keys
9	M6 Square nut	12	Piece	Steel	Color Zinc	
10	M6 B-head screw	12	Piece	Steel	Color Zinc	
11	Allen wrench	1	Piece	Steel	Color Zinc	

## Specification

Model No.	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)
P04-60-45	4	600	450	280
P06-60-45	6	600	450	368
P06-60-60			600	
P09-60-45	9	600	450	501
P09-60-60			600	
P12-60-45	12	600	450	635
P12-60-60			600	
P15-60-45	15	600	450	769
P15-60-60			600	
P18-60-45	18	600	450	901
P18-60-60			600	
P22-60-60W	22	600	600	108

RAL9004	RAL7035
black	grey
