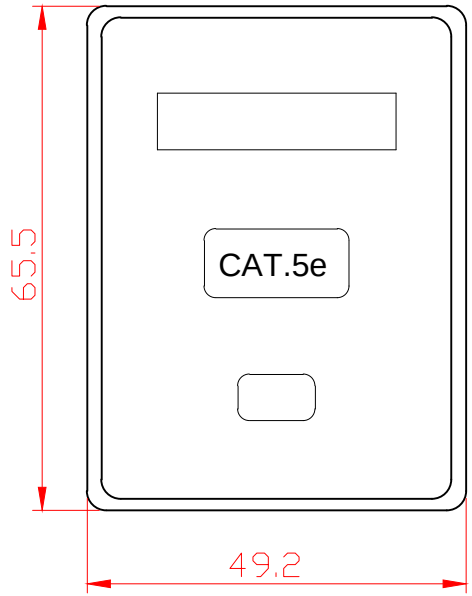

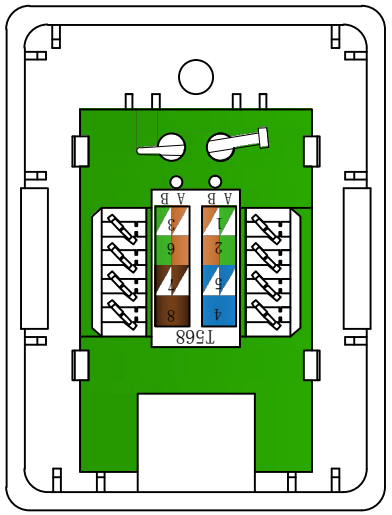

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40°TO+85°
2. OPERATION:0°TO70°

MECHANICAL:

1. HOUSINGG MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY ABS
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
6. RJ45 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN;

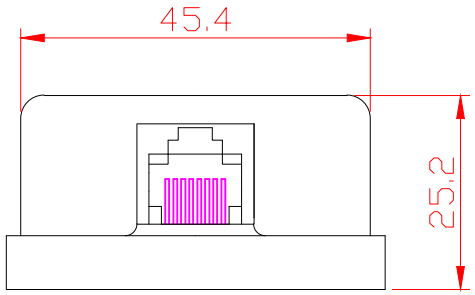

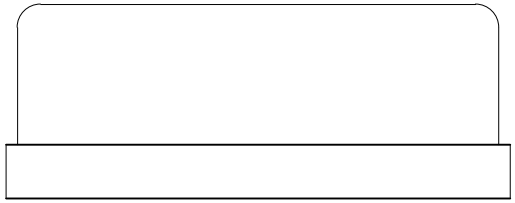

SYM	Number	Bill No.of Alteration	Signature	Date

Drawn		2015.12.28	Tolerance
Checked		2015.12.28	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'
Approved		2015.12.28	

Material				Item No.	04-003-001
Angles Projection	Size	Scale	Unit	Part Name	Surface Box 1 Port
	A4	X:1	mm		
Sheet	1 OF 1	Version: A/0		ERP Part No.	