



$L \pm T$

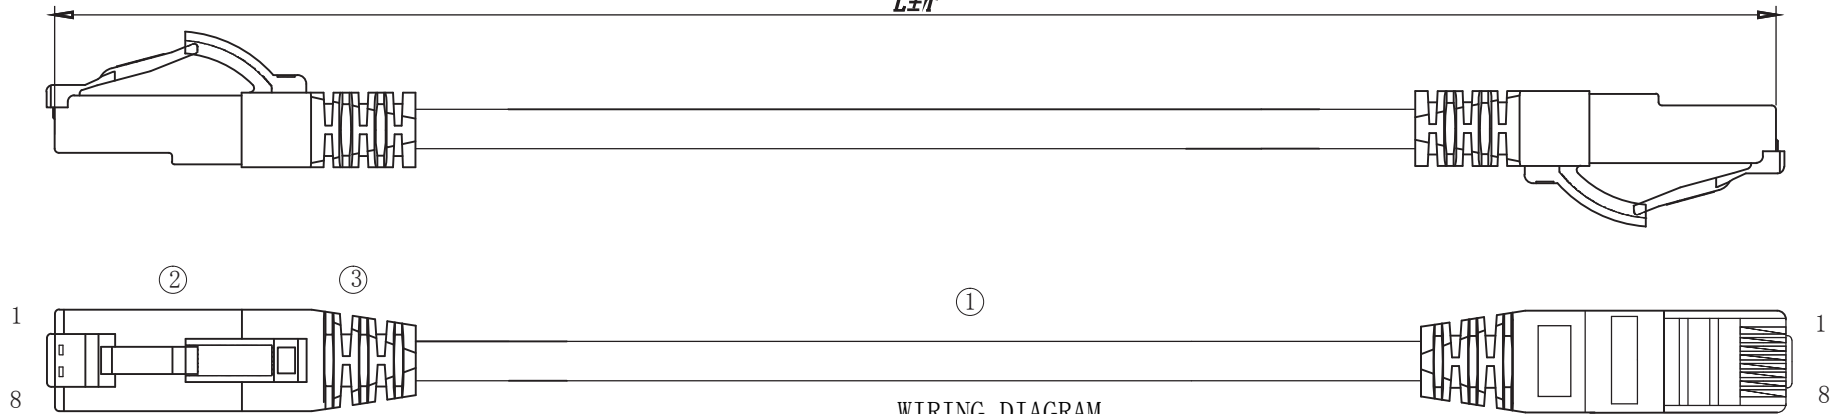

WIRING DIAGRAM



Remarks:

- 1. 100% open circuit short circuit&displacement test
- 2. Fluke channel link test(100%pass the test)
- $L \leq 5m$: link 50m+L+L
- $5 < L \leq 15m$: link 50m+0.5m+L
- $15 < L \leq 30m$: Fluek channel test
- TEST LIMIT: ISO11801 Channel Class E
- Working temperature: $-10^{\circ}C \sim +60^{\circ}C$
- 4. ROHS2.0 AND REACH COMPLIANT

Material list:

③	Jacket	PVC 75A		
②	PLUG	RJ45 8P8C PLUG CAT.5e UTP Pin Gold 3U ,Circle Type	2PCS	
①	WIRE	Cat.5e 7/0.16CU.4P UTP JACKET: PVC OD: 5.0±0.2MM	1PCS	
NO.	Material name	Specifications	QTY	REMARK

						Customer name		Customer Part NO	
						Product name		CAT.5E UTP PATCH CORD	
		New edition		2019-08-30		A		Unit	
Darwing		Audit		Amendment record		Darwing		Audit	
						Approve		Date	
								2019-08-30	