

Single Section Wall Mounted Cabinets

ECONOMY



Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard.

Feature

19 inch standard;

Removable Side Panels, side locks optional;

Knock off hole for entering cable on both top cover, bottom panel, rear panel

Turning angle of front door is over 180 degrees

Easy mounting installation

Unassembled package saving shipping space

fans, shelf, PDU are optional

Loading Capacity

80KG

Degree of Protection

IP20

Material

SPCC Cold Rolled Steel

Thickness:1.2mm-0.7mm


Surface Finish:

Powder coating

Cabinet details



Fan ventilation hole

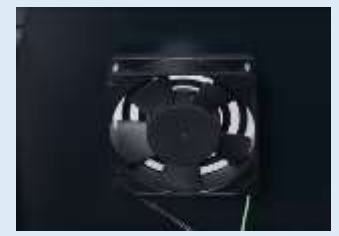

Cooling Fan optional



Removable side panels
(Side lock optional)



Cable entrance on rear panel




Front tempered glass door
with metal perforated frame




Ground wire optional

Single Section Wall Mounted Cabinets- ECONOMY


Exploded-View

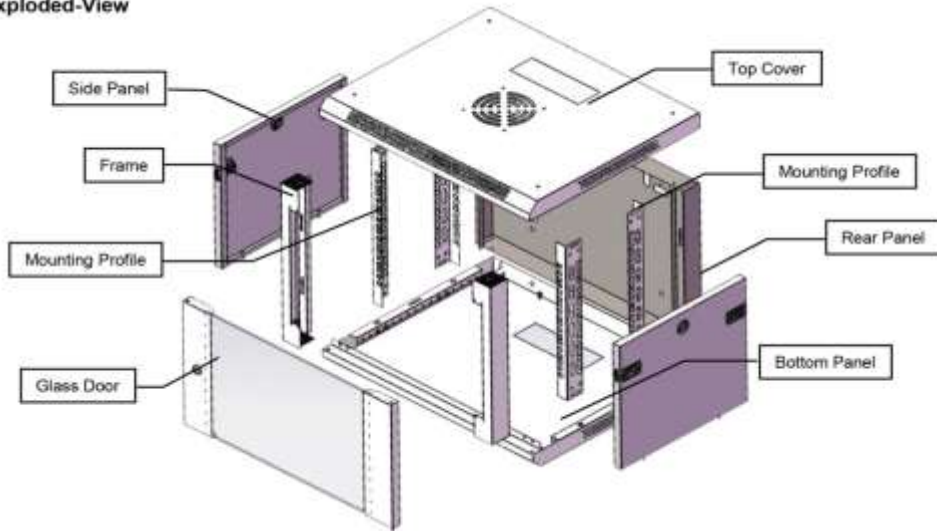


Main dimension

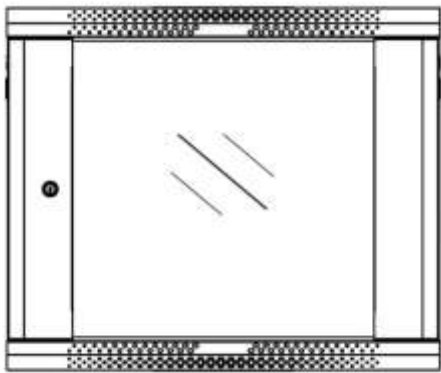


Front view
(Toughened glass)

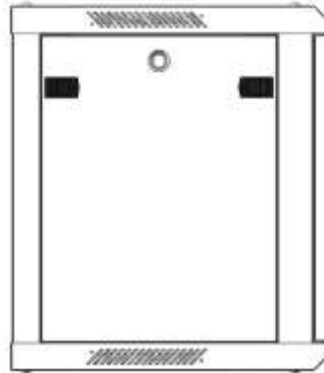


Side view

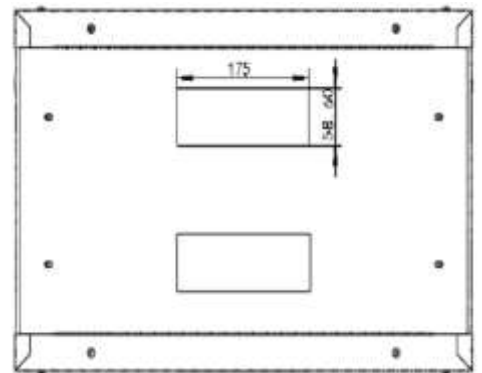

Back view

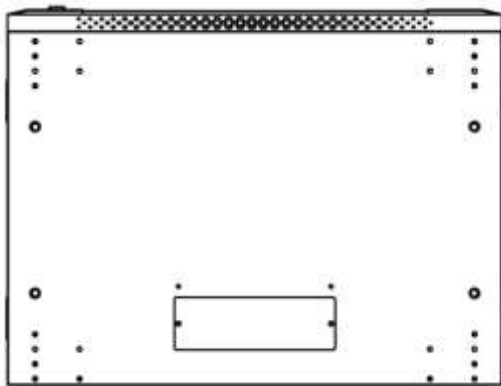

Bottom view

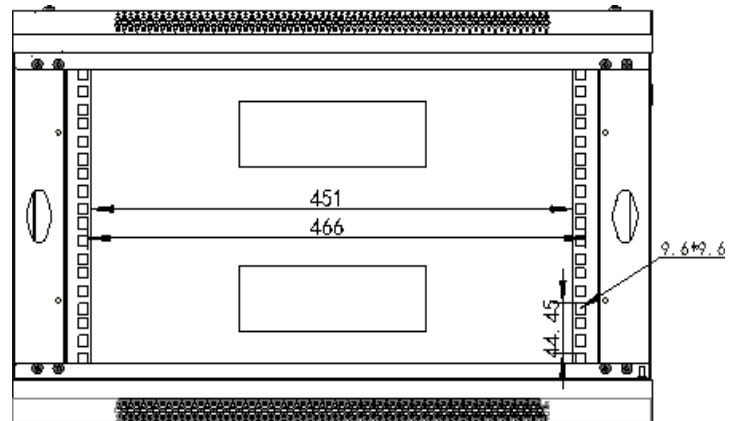

Inside view

W3 Single Section Wall Mounted Cabinets

Main Parts

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Mounting profile	4	Piece	Coated Zinc plate t1.2	Coated Zinc	with U mark
2	Frame	2	Piece	SPCC cold rolled steel t0.7	Powder coated	
3	Side panel	2	Piece	SPCC cold rolled steel t0.7	Powder coated	
4	Top cover	1	Piece	SPCC cold rolled steel t0.7	Powder coated	
5	Bottom panel	1	Piece	SPCC cold rolled steel t0.7	Powder coated	
6	Rear panel	1	Piece	SPCC cold rolled steel t0.7	Powder coated	
7	Front door	1	Piece	Toughened glass door/Frame t0.7	Powder coated	
8	Lock	1	Piece	Steel	Color Zinc	with 2 keys
9	M6 Square nut	12	Piece	Steel	Color Zinc	
10	M6 B-head screw	12	Piece	Steel	Color Zinc	
11	Allen wrench	1	Piece	Steel	Color Zinc	

Specification

Model No.	Capacity	Width	Depth	Height	Packing dimension	Volume
	(U)	(mm)	(mm)	(mm)	(mm)	(CBM)
E06-54-45	6	540	450	368	170*560*460	0.044
E06-54-60			600		170*560*620	0.060
E09-54-45	9	540	450	501	170*560*550	0.052
E09-54-60			600		170*560*620	0.060
E12-54-45	12	540	450	635	170*560*680	0.065
E12-54-60			600		170*560*680	0.065
E15-54-45	15	540	450	769	140*560*810	0.064
E15-54-60			600		140*560*810	0.064

Color

RAL9004

RAL7035

black

grey

